



CONCRETE ROADWAY – RIGID TYPE

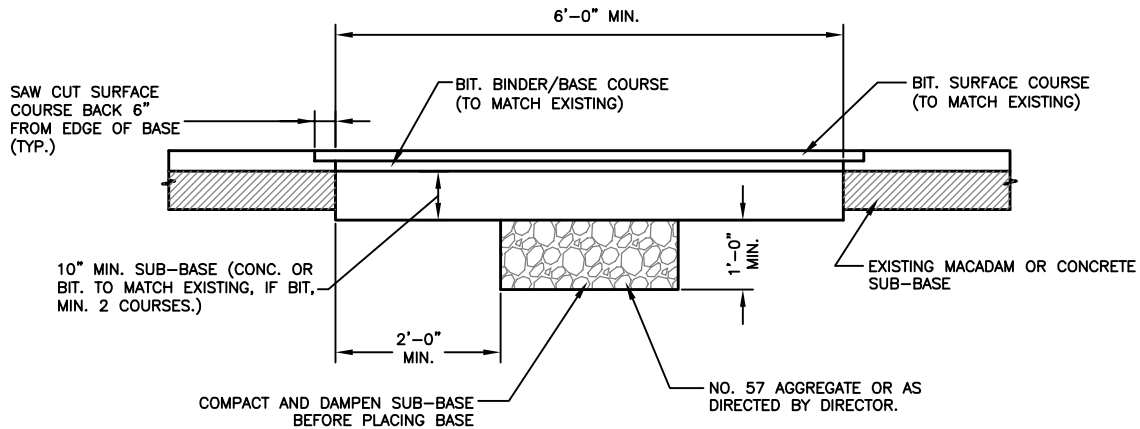

MACADAM ROADWAY – FLEXIBLE TYPE

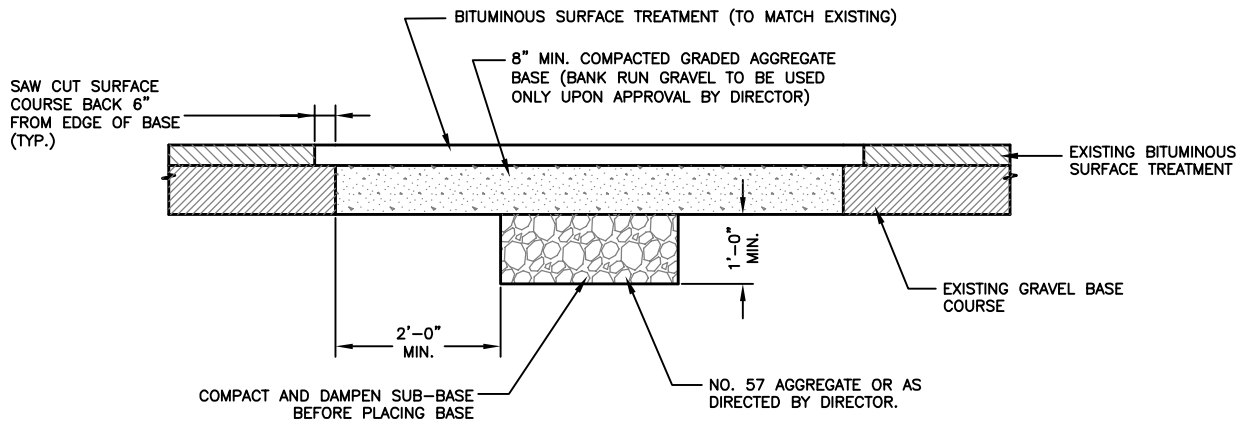

SURFACE TREATED GRAVEL ROADWAY

NOTE: BACKFILL IN TRENCH SHALL BE THOROUGHLY COMPACTED BY TAMPING OR BY SOME OTHER APPROVED METHOD IN 6" LAYERS BEFORE PATCH IS MADE.

NO EXCAVATION OR CAVE-IN WILL BE PERMITTED UNDER EXISTING SURFACES AND NO BELLING OF THE TRENCHES WILL BE ALLOWED. SHEETING OR SHORING WILL BE USED WHEN SO DIRECTED BY ENGINEER.

(NO SCALE)

CECIL COUNTY DEPARTMENT OF PUBLIC WORKS	STANDARD ROAD & STREET DETAILS	REVISED
	<b>METHOD OF CUTTING &amp; REPAIRING OPENING IN EXISTING ROADWAYS</b>	05/07
		<b>R-31</b>